


02YAFCY

**HF - Coaxial Cable 75 Ohm
SAT - Conform**

Application:

Suitable for applications in dry and humid locations as an aerial cable for community- and cable television networks. SAT-conform.

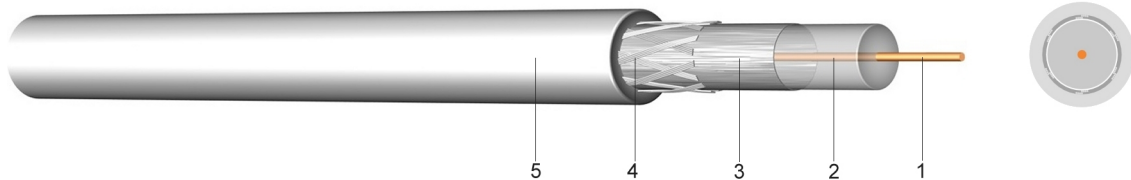

Construction:

- 1 solid bare copper
- 2 core insulation of polyethylene (PE)
- 3 static screen of aluminium foil
- 4 wide-meshed tinned copper braiding
- 5 outer sheath of polyvinylchloride (PVC), white

Technical data:

Impedance	ZL	[Ohm]	75 +/-3
Attenuation	100 MHz	[dB / 100m]	6,4
	300 Mhz	[dB / 100m]	11,1
	450 Mhz	[dB / 100m]	13,8
DC resistance	inner conductor	[Ohm / km]	131,0
	outer conductor	[Ohm / km]	20,0

Type	Copper figure kg/km	Overall diameter appr.mm	Weight appr. kg/km
02YAFCY 1,0/4,5	13,4	6,5	44