


## 2YSLCYK

## EMV Composite Connection Cable with Copper Braiding

### Application:

These composite connection cables are produced according to the European EMV Guidelines and are particularly suitable for plants and facilities with appliances and electrical equipment of which electromagnetic interference fields could have an undue influence on the surroundings. These connection cables are well suited for fixed installations and for flexible use in motive power engineering with frequency converting technology (e.g. machine and plant engineering) for medium-level mechanical loads in dry, humid and wet locations and outdoor.

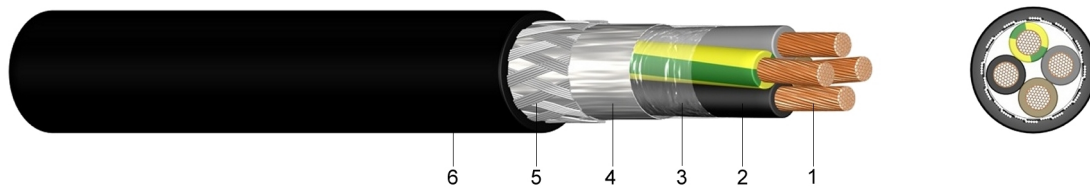

### Construction:

- 1 ..... fine-stranded bare copper
- 2 ..... core insulation of polyethylene (PE)
- 3 ..... layer of foil
- 4 ..... screen of PETP aluminium foil
- 5 ..... concentric screen of tinned copper wires
- 6 ..... outer sheath of polyvinylchloride (PVC), black

### Standards:

DIN VDE 0281  
 DIN EN 60228 class 5 (construction)  
 HD 308 S2 (core identification)  
 DIN VDE 0207  
 EN 55011

### Technical data:

Nominal voltage U <sub>0</sub> /U		[V]	600 / 1000 Volt
Test voltage at 50 Hz	core / core	[V] <sub>AC</sub>	4000
	core / screen	[V] <sub>AC</sub>	4000
Temperature range	in motion		-5°C till +70°C
	fixed		-40°C till +70°C
Operating temperature	short circuit	°C	160
Short circuit time	max.	[sec]	5
Bending radius	one time / fixed	x diameter	7,5
	in motion	x diameter	15,0
Flammability	standard		EN 60332-1-2

Number of cores and nominal cross section mm <sup>2</sup>	Copper figure kg/km	Cond. construction (appr. value) mm	Overall diameter mm	Weight appr. kg/km
4 x 1,5	95,0	30 x 0,26	11,4	170
4 x 2,5	149,8	48 x 0,26	13,0	235
4 x 4	234,2	56 x 0,31	14,7	320
4 x 6	319,7	84 x 0,31	16,7	425
4 x 10	531,8	80 x 0,41	20,9	665
4 x 16	788,2	128 x 0,41	23,7	970

Number of cores and nominal cross section mm <sup>2</sup>	Copper figure kg/km	Cond. construction (appr. value) mm	Overall diameter mm	Weight appr. kg/km
4 x 25	1.233,6	200 x 0,41	28,3	1.400
4 x 35	1.660,8	280 x 0,41	32,1	1.890
4 x 50	2.341,4	400 x 0,41	38,7	2.700
4 x 70	3.191,0	350 x 0,51	43,2	3.480
4 x 95	4.309,4	485 x 0,51	49,3	4.570
4 x 120	5.107,2	614 x 0,51	53,4	5.660
4 x 150	6.393,6	765 x 0,51	59,6	6.930
4 x 185	8.189,8	944 x 0,51	64,1	8.330