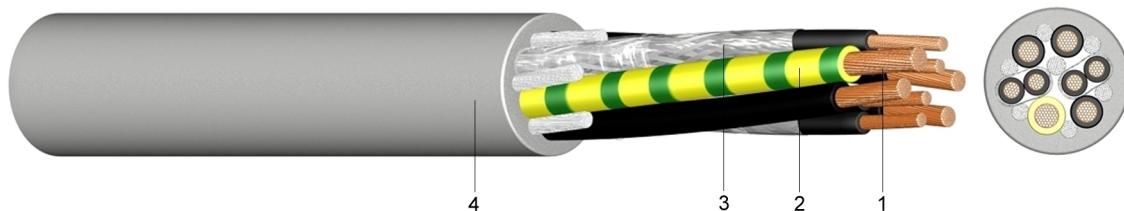


SL 800
**Combined Composite Connection Cable
with PUR Outer Sheath**
Application:

This cable is well suited for flexible use in industries such as industrial robots, cable chains or machine and plant engineering. It is used for high mechanical stress in dry, damp and wet locations as well as at low temperatures as a connection cable for the power supply and as a signal and data cable for the steering and control of motors.


Construction:

- 1 very fine-stranded bare copper
- 2 core insulation of thermoplastic polyester elastomer or polypropylene (PP)
- 3 pair wise shielding of aluminium foil
- 4 outer sheath of polyurethane (PUR), grey, oil and abrasion resistant, UV-resistant

Standards:

in according with DIN VDE 0281
DIN EN 60228 class 6 (construction)

Technical data:

Nominal voltage Uo/U		[V]	600 / 1000 Volt
Test voltage		[V]AC	4000
Temperature range	in motion		-30°C till +80°C
Operating temperature	short circuit	°C	150
Short circuit time	max.	[sec]	5
Bending radius	min.	x diameter	7,5
Oil-resistant	standard		EN 60811-2-1
Flammability	standard		EN 60332-1-2

Number of cores and nominal cross section mm ²	Copper figure	Wire diameter	Overall diameter	Weight
				appr. kg/km
4 x 0,75 + 2x(2x0,34)	65,3	0,16	9,7	125
4 x 1,50 + 2x(2x0,75)	121,0	0,16	11,4	350
4 x 2,50 + 2x(2x0,75)	159,4	0,16	13,7	244
4 x 4,00 + (2x0,75)+(2x1)	219,8	0,16	15,6	352
4 x 6,00 + (2x0,75)+(2x1)	299,5	0,21	18,3	473
4 x 10,00 + (2x0,75)+(2x1)	453,1	0,21	22,1	685
4 x 16,00 + 2x(2x1)	687,4	0,21	25,2	993
4 x 25,00 + 2x(2x1,5)	1.033,0	0,21	30,0	1.740
4 x 35,00 + 2x(2x1,5)	1.440,0	0,21	32,2	2.410