


H05BQ-F Polyurethane Building Site Cable with Rubber Insulated Conductors

Application: This termination and connection cable with high mechanical stress-resistance can be used in dry, damp or wet rooms as well as in the open-air. It is ideal for application in industrial plants, building sites, in fact everywhere where extreme wear and tear resistance is required and where the cable is subjected to hard utilisation.

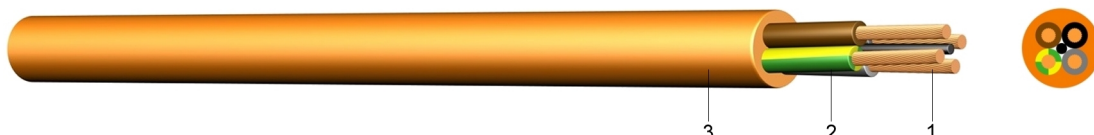

Construction:

- 1 fine-stranded tinned or bare copper
- 2 core insulation of a rubber compound (EL6)
- 3 outer sheath of polyurethane (PUR), orange

Standards:

- DIN VDE 0282-10
- DIN EN 60228 class 5 (construction)
- HD 308 S2 (core identification)
- HD 22.10 S1+A1

Technical data:

Nominal voltage U ₀ /U	[V]	300 / 500 Volt
Test voltage	[V] _{Ac}	2000
Temperature range	in motion	-40°C till +90°C
Operating temperature	short circuit	200
Short circuit time	max.	[sec]
Bending radius	one time / fixed	5
Bending radius	in motion	4 x diameter
Oil-resistant	standard	5
Flammability	standard	EN 60811-2-1 EN 60332-1-2

Number of cores and nominal cross section	Copper figure	Cond. construction (appr. value)	Overall diameter	Weight
mm ²	kg/km	mm	appr. mm	appr. kg/km
2 X 0,75	14,4	24 x 0,21	6,8	51
3 G 0,75	21,6	24 x 0,21	7,4	66
4 G 0,75	28,8	24 x 0,21	7,9	79
5 G 0,75	36,0	24 x 0,21	8,8	97
2 X 1	19,2	30 x 0,21	7,4	61
3 G 1	28,8	30 x 0,21	7,8	76
4 G 1	38,4	30 x 0,21	8,4	92
5 G 1	48,0	30 x 0,21	9,4	116